



# H&L Tooth Company

© H&L Tooth Company 2015




## H&L® Allied Equipment for Pavement Breakers & Asphalt Cutters

Dimensional Chart for • Standard Taper • Short Taper • Blunted Hardface H&L® Blades

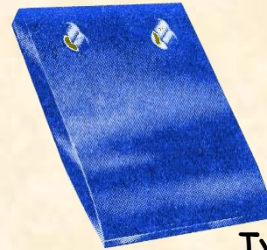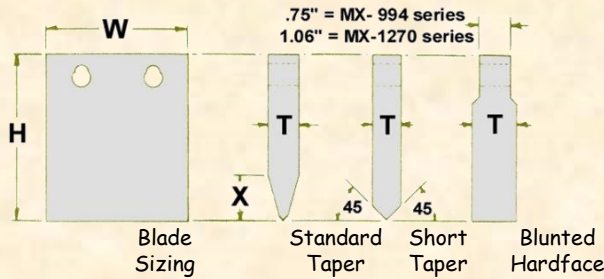

**Typical Blade**

W	H	T	X	Standard Taper	Short Taper	Blunted Hardface
7.00"	8.44"	0.75"	2.50"	MX-994E	MX-994E-SH	MX-994E-BL
7.00"	10.00"	0.75"	2.50"	MX-994H	MX-994H-SH	MX-994H-BL
7.00"	12.00"	0.75"	2.50"	MX-994AC	MX-994AC-SH	MX-994AC-BL
7.00"	14.00"	0.75"	2.50"	MX-994AF	MX-994AF-SH	MX-994AF-BL
7.00"	16.00"	0.75"	2.50"	MX-994AN	MX-994AN-SH	MX-994AN-BL
8.00"	10.00"	2.00"	2.50"			MX-994S-BL
8.00"	16.00"	1.00"	2.50"			MX-994BJ-BL
10.00"	12.00"	0.75"	2.50"	MX-994AD	MX-994AD-SH	MX-994AD-BL
10.00"	14.00"	0.75"	2.50"	MX-994AG	MX-994AG-SH	MX-994AG-BL
12.00"	8.44"	0.75"	2.50"	MX-994G	MX-994G-SH	MX-994G-BL
12.00"	12.00"	0.75"	2.50"	MX-994P	MX-994P-SH	MX-994P-BL
7.00"	10.00"	1.06"	2.75"	MX-1270F	MX-1270F-SH	MX-1270F-BL
7.00"	10.00"	1.06"	2.75"			MX-1270F-BLN
7.00"	14.00"	1.06"	2.75"			MX-1270G-BL
8.00"	10.00"	1.06"	2.75"			MX-1270H-BL
8.00"	10.00"	2.00"	2.75"			MX-1270J-BL
9.25"	8.00"	1.06"	2.75"			MX-1270K-BL
9.25"	10.00"	1.06"	2.75"	MX-1270C	MX-1270C-SH	MX-1270C-BL
9.25"	10.00"	1.06"	3.75"	MX-1270P		
10.00"	10.00"	1.06"	2.75"			MX-1270M-BL




**MX-994B**

Combination One-Piece Holder and Tool Head  
Fits directly to Arrow Machines

### H&L BLADE HOLDERS for ARROW Machines

Blade thickness at Blade-Holder Connection  
0.75" using two-(2) 25FP Flexpins®



**MX-994DG**

WELD-ON STYLE BLADE HOLDER  
For welding to Arrow Tool Heads



Call **FACTORY DIRECT 1-800-HL TOOTH**  
for order inquiries!  
(1-800-458 6684)  
[www.HLTOOTH.com](http://www.HLTOOTH.com)

SHIPPED FROM OUR CENTRALLY  
LOCATED PLANT TO SERVE YOU  
BETTER!

