

T507.2020

QUALITY
since 1931


©H&L Tooth Company 2020

FYI...For Your Information:

Be aware that three-(3) pins sizes exist for the 2AH Tooth system. H&L and most suppliers for the "2B" series adapter use a .25" diameter X 1.50" Spiral Pin for the tooth-to-adapter connection. However, FFC style 2B adapters uses a larger .31" diameter X 1.50" Spiral pin and/or CRD style .31" diameter X 1.75 in length. H&L Tooth Company offers all three.


H&L 2AH teeth will fit both hole sized "2B" adapters as well as the original "2A" Crimp-on adapter.

When ordering 2AH teeth for pin connection, H&L Customer Service will supply 2BPN pins, unless requested to supply the larger 2BPN-FFC or longer pins.

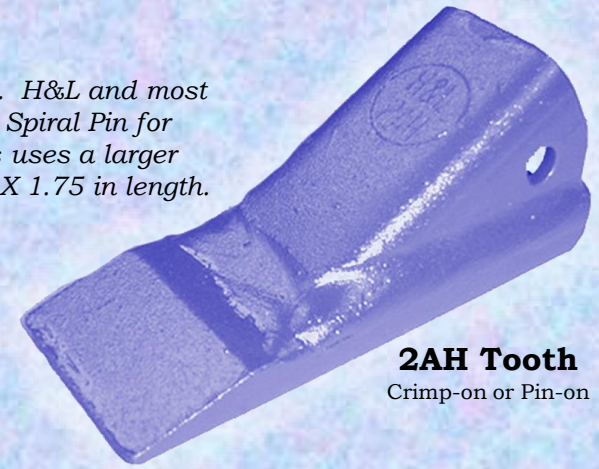


2AH Tooth
Crimp-on or Pin-on

FFC Style

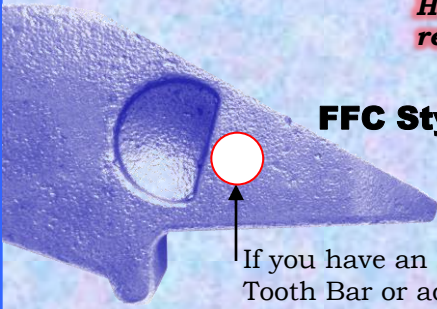


If you have an **FFC** style Tooth Bar or adapter, please be aware it requires a .31" diameter Spiral Pin.

H&L Style

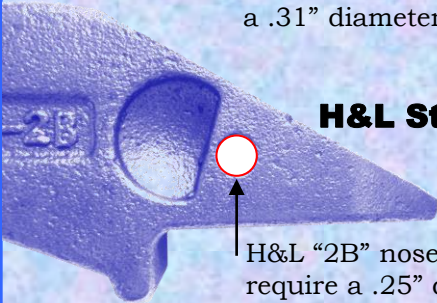

H&L "2B" nosepiece require a .25" diameter Spiral Pin.

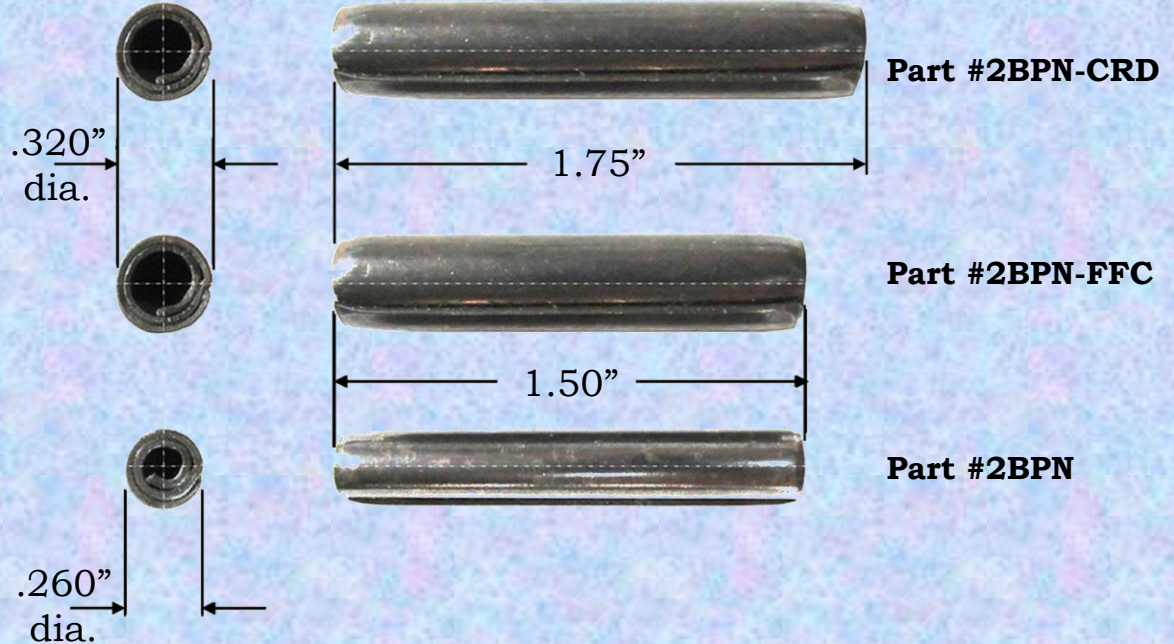

H&L® TOOTH COMPANY

10055 E. 56th Street N. Tulsa, Oklahoma

2AH Tooth for 2A or 2B Adapter Connections
Engineering Quality Awareness

*This small fabricated trenching tooth was first designed and introduced in 1946. H&L's Original **Crimp-on** "2A" Tooth systems were first developed to fit Buckeye and Cleveland Wheel Trenching Machines. Today, copies of the 2AH tooth are being produced by many Manufacturers worldwide... if it doesn't say H&L its not **Made in the USA!***